

## R1234yf SELF-SEALING DESIGN RECHARGE KIT

### FEATURES

- Charge A/C systems using R1234yf self-sealing/reusable designed cans

### SAFETY WARNING AND PRECAUTIONS




**WARNING:** Make sure hose has been purged or vacuumed before use

**WARNING:** Wear safety glasses

### OPERATING INSTRUCTIONS

1. Connect can tap fitting to hose and coupler assembly.
2. Connect refrigerant can to the bottom of can tap, turn *counterclockwise*.
3. Turn handle clockwise, to depress the valve in refrigerant can, to flow refrigerant.
4. First time use, purge air in hose.
5. Connect coupler to low side of system, refrigerant will flow into the system.
6. When can is empty properly discard can.

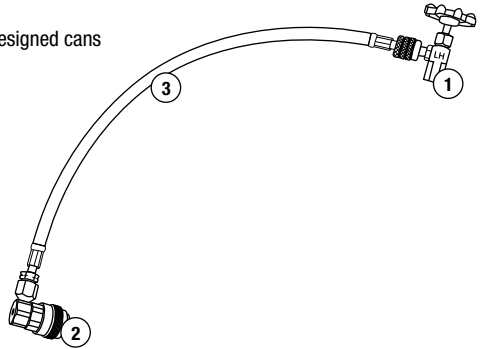

### PARTS LIST

ITEM#	PART#	DESCRIPTION
1	85512-YF	R1234yf 1/2" ACME-LH thread self-sealing design can tap valve
2	67534	R1234yf low side quick coupler 12 mm-F x 14 mm
3	83181	R1234yf 18" blue hose

**For parts or service contact the service department: 1-888-825-6989**

**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).