




DUAL R134a/R1234yf DIGITAL MANIFOLD

Includes Refrigerant and Oil Capacities for over 1000 vehicle makes and models

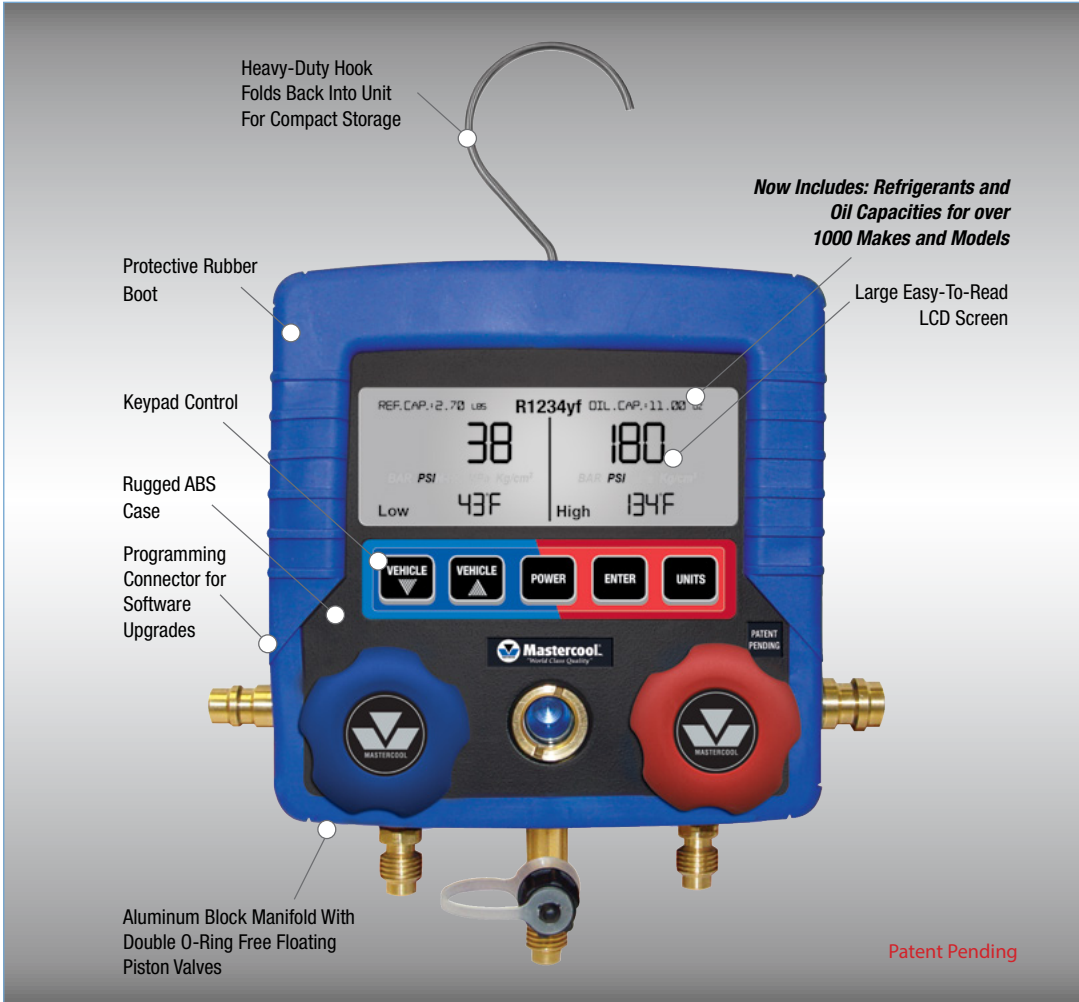

SPECIFICATIONS:

- Refrigerant: R1234yf/R134a
- Pressure & Vacuum Display:
Low Side - PSI, Bar, MPa, Kg/cm² & InHg
High Side - PSI, Bar, MPa, Kg/cm²
- Temperature Display:
-40 to 200°F (-4 to 93°C)
- Response Time:
250 mSec.
- Connection:
1/2" acme
- Operating Temperature:
32 to 122°F (0 to 45°C)
- Power:
9V DC battery
- Battery Life:
350 hours continuous use
- Low Battery Indicator:
Special ICON on LCD

This manifold offers a large easy to read LCD that displays temperature, pressure and vacuum readings for R1234yf and R134a. The unit easily allows the technician to obtain refrigerant and oil capacity readings for popular automobile manufacturers. This unit also performs systems leak check at the conclusion of the evacuation process. To insure lasting performance and durability the manifold case is constructed of ABS material and protected by a rugged rubber boot. The technician now has a fully functional manifold with the intelligence to quickly access and deliver the accurate information needed to do the job right!

Manufacturers Include: Acura, Alfa-Romeo, Aston Martin, Audi, BMW, Buick, Cadillac, Chevrolet, Chrysler, Citroen, Daewoo, Daihatsu, Dodge, Fiat, Ford, GMC, Honda, Hummer, Hyundai, Infiniti, Isuzu, Jaguar, Jeep, Kia, Lancia, Land Rover, Lexus, Lincoln, Mazda, Mercedes-Benz, Mercury, Mini, Mitsubishi, Nissan, Oldsmobile, Opel-Vauxhall, Peugeot, Plymouth, Pontiac, Porsche, Renault, Rover, Saab, Saturn, Scion, Seat, Skoda, Smart, Ssangyong, Subaru, Suzuki, Toyota, Volkswagen, Volvo

99134-AR

Dual R134a/R1234yf Digital Manifold only

99172

Complete Kit in a blow molded case Includes: Dual R134a/R1234yf digital manifold with a set of 3-72" R134a hoses, set of R134a couplers, set of R1234yf couplers, 1/2" ACME-M x 1/2" ACME-F LH thread adapter, (2) 12 mm-M x 14 mm-F R1234yf adapters



99172