
98310 WIRELESS REFRIGERANT CHARGING SCALE WITHOUT SOLENOID 98315 WIRELESS REFRIGERANT CHARGING SCALE WITH SOLENOID

Mastercool

"World Class Quality"

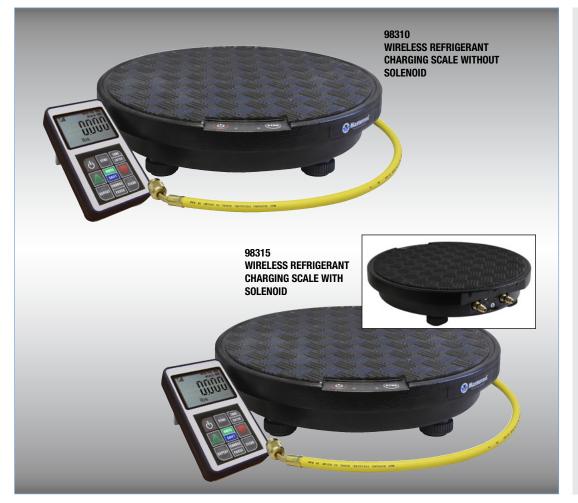

SPECIFICATIONS:

1 ASPEN DRIVE, RANDOLPH, NJ 07869 PHONE: 973-252-9119 / FAX: 973-252-2455

WEB: WWW.MASTERCOOL.COM

- Capacity: 243 lbs (110 kg)
- Accuracy: ≤±0.05% of reading
- Resolution: 0.05 lb / 0.5 oz / 0.01 kg
- Automatic Shut-Off: After 3 hours
- Operating Temperature: 32°F to 120°F (0°C to 49°C)
- Battery Life: *Monitor* - approximately 20 hours *Platform* - approximately 30 hours
- 31 cm x 31 cm Platform
- Accepts all US & EU standard cylinders

FEATURES

- Wireless unit prevents unwanted tangles in wires
- Easily store the remote in the body of the platform
- Keypad provides synchronization and zeroing
- Extremely accurate weight sensor
- Magnet on remote allows easy placement on fixtures
- Battery life symbol for platform and remote constantly displayed on LCD
- Wireless signal strength indicator conveniently displays on remote

FUNCTIONS:

CHARGE PROGRAMMING:

Allows user to program desired quantities. Before charge is complete, an alarm will sound allowing ample time to turn off refrigerant supply.

PAUSE/CHARGE (98315 model only): This feature allows user to stop and continue charging.

TANK CAPACITY PROGRAMMING: EMPTY/FULL tank feature allows user to know the amount of

refrigerant in the tank at any time.

REPEAT (98315 model only): Allows user to charge previously stored amount.